

# Installation de MPD sur un raspberry pi !

Nous allons voir comment installer MPD (Music Player Daemon) sur le raspberry pi.

MPD (Music Player Daemon) est un lecteur qui utilise une architecture client/serveur, ce qui permet de le contrôler à distance. De nombreux clients sont disponibles. Il reste néanmoins un lecteur de choix pour une machine de bureau, léger et efficace.

## Installation

1. On met à jour la base de packages de raspbian

```
apt-get update
apt-get upgrade
```

2. On installe les outils nécessaires :

```
apt-get install alsa-utils mpg321 lame
```

3. On vérifie si le module sonore est chargé, si pas on le charge :

```
modprobe snd-bcm2835
```



Pour charger le module au démarrage, on peut l'ajouter dans le fichier `/etc/modules`

4. On configure la sortie audio : On sélectionne la sortie audio que l'on veut utiliser. Pour cela on modifie le dernier chiffre par ce que l'on veut utiliser (**0=auto, 1=analog, 2=HDMI**).

```
amixer cset numid=3 1
```

4. On installe le serveur mpd :

```
apt-get install mpd
```

On change les droits sur le répertoire `/var/lib/mpd` et `/var/run/mpd`

```
chmod -R g+w /var/lib/mpd
chmod -R g+w /var/run/mpd
```

5. On édite le fichier de configuration `/etc/mpd.conf`

```
# Files and directories
#####
#
# This setting controls the top directory which MPD will search to discover
the
# available audio files and add them to the daemon's online database. This
# setting defaults to the XDG directory, otherwise the music directory will
```

```
be
# be disabled and audio files will only be accepted over ipc socket (using
# file:// protocol) or streaming files over an accepted protocol.
#
music_directory      "/var/lib/mpd/music"
#
# This setting sets the MPD internal playlist directory. The purpose of this
# directory is storage for playlists created by MPD. The server will use
# playlist files not created by the server but only if they are in the MPD
# format. This setting defaults to playlist saving being disabled.
#
playlist_directory   "/var/lib/mpd/playlists"
#
# This setting sets the location of the MPD database. This file is used to
# load the database at server start up and store the database while the
# server is not up. This setting defaults to disabled which will allow
# MPD to accept files over ipc socket (using file:// protocol) or streaming
# files over an accepted protocol.
#
db_file              "/var/lib/mpd/tag_cache"
#
# These settings are the locations for the daemon log files for the daemon.
# These logs are great for troubleshooting, depending on your log_level
# settings.
#
# The special value "syslog" makes MPD use the local syslog daemon. This
# setting defaults to logging to syslog, otherwise logging is disabled.
#
log_file             "/var/log/mpd/mpd.log"
#
# This setting sets the location of the file which stores the process ID
# for use of mpd --kill and some init scripts. This setting is disabled by
# default and the pid file will not be stored.
#
pid_file             "/var/run/mpd/pid"
#
# This setting sets the location of the file which contains information
# about
# most variables to get MPD back into the same general shape it was in
# before
# it was brought down. This setting is disabled by default and the server
# state will be reset on server start up.
#
state_file           "/var/lib/mpd/state"
#
# The location of the sticker database. This is a database which
# manages dynamic information attached to songs.
#
sticker_file         "/var/lib/mpd/sticker.sql"
#
#####
```

```
###  
...  
#bind_to_address      "localhost"  
...
```



si vous rencontrez des problèmes de connexion au serveur MPD, commentez la ligne `bind_to_address`

6. On copie nos musiques sur le raspberry pi dans le répertoire **`/var/lib/mpd/music`**

7. On crée un fichier `radio.m3u` avec les radios que l'on veut pouvoir écouter par internet et on le copie dans **`/var/lib/mpd/playlists`**

```
#EXTM3U  
#EXTINF:-1,Pure FM  
http://broadcast.infomaniak.net:80/purefm-128.mp3  
  
#EXTINF:-1,Classic 21  
http://broadcast.infomaniak.net:80/classic21-128.mp3  
  
#EXTINF:-1,Vivacité  
http://broadcast.infomaniak.net:80/vivabxl-128.mp3  
  
#EXTINF:-1,Bel RTL  
http://audiostream.rtl.be/belrtl128  
  
#EXTINF:-1,Contact FM  
http://radio-contact.ice.infomaniak.ch:80/radio-contact-high  
  
#EXTINF:-1,Nostalgie  
http://broadcast-adswizz.infomaniak.net:8000/nostalgiepremium-128.mp3  
  
#EXTINF:-1,NRJ  
http://broadcast.infomaniak.net:80/nrjbe-high.mp3  
  
#EXTINF:-1,Radio Contact  
http://audiostream.rtl.be/contactfr
```




Pour trouver les adresses de streaming des radios, se rendre sur le site [European radio](#).

Télécharger le fichier `radio.m3u` et copier le contenu dans notre fichier `radio.m3u` en respectant la syntaxe.

8. On installe un client sur son pc :

```
apt-get install gmpc
```

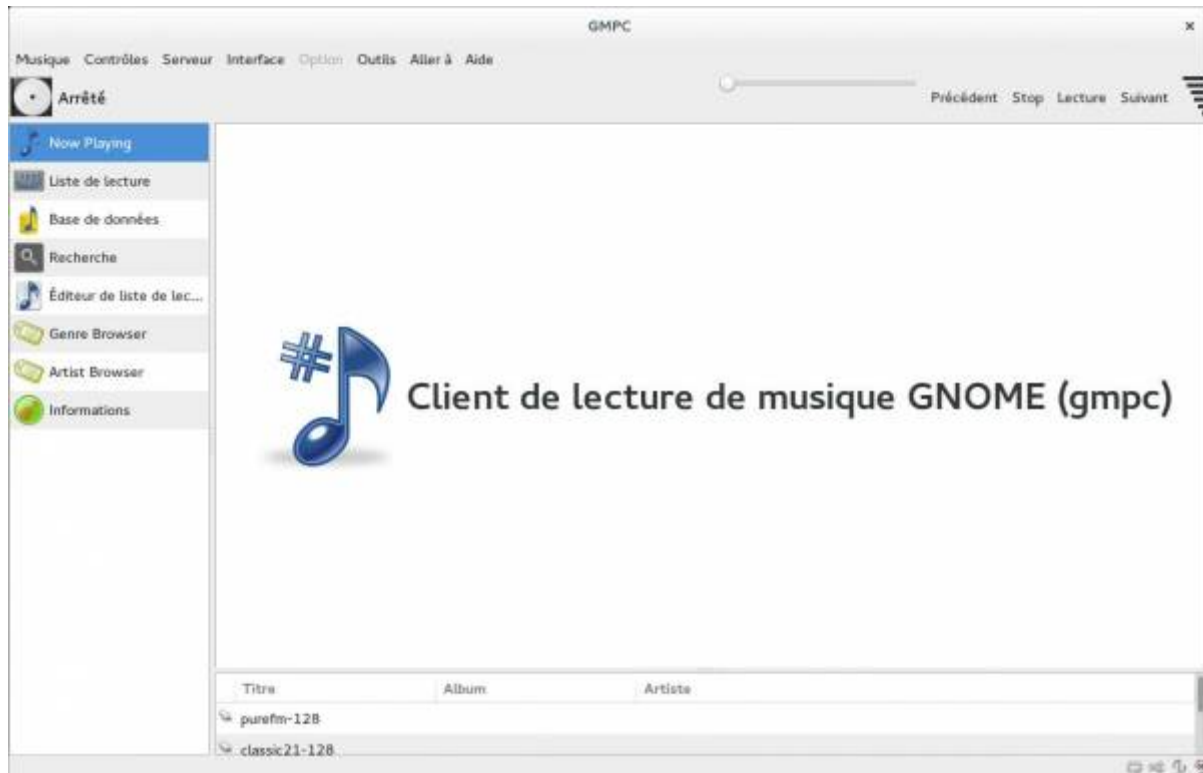

## Références :

- [Wiki debian](#)
- [MPD et MPC sur raspberry pi](#)
- [rompr sur raspberry pi](#)

From:

<https://www.loligrub.be/wiki/> - **LoLiGrUB**

Permanent link:

[https://www.loligrub.be/wiki/mpd\\_raspberry\\_pi?rev=1383644271](https://www.loligrub.be/wiki/mpd_raspberry_pi?rev=1383644271)

Last update: **2014/12/27 08:14**

